




Test Data Sheet

PM10 - VIS

S/N:

Resonant electro-optic phase modulator

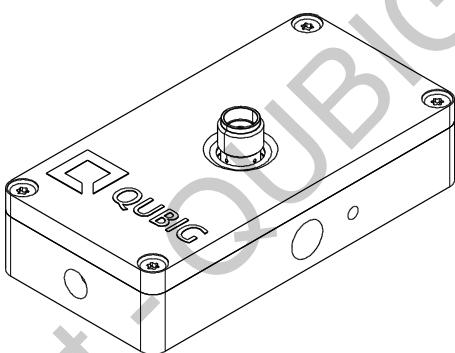

RF properties	Value	Unit
Resonance frequency: f_0 ¹⁾	7.3 - 7.4	GHz
Preset frequency: f_{set} ¹⁾	7.35	GHz
Bandwidth: Δv	25.6	MHz
Quality factor Q	287	
Required RF power for 1 rad @ 369nm	23.4	dBm
max. RF power: RF_{max} ²⁾	2	W

Optical properties		
EO crystal	MLN	
Aperture	$\varnothing 2$	mm
Wavefront distortion (@ 633 nm)	$\lambda/4$	
recommended max. optical intensity (@ 369nm)	0.1	W/mm ²
AR coating ($R_{avg} < 1\%$)	360 - 650	nm

¹⁾ at 24.7 °C ²⁾ no damage with $RF_{in} < 5W$, but use of a proper heatsink is strongly recommended at high powers

Measured phase modulation

Fig. 1: Oscilloscope trace

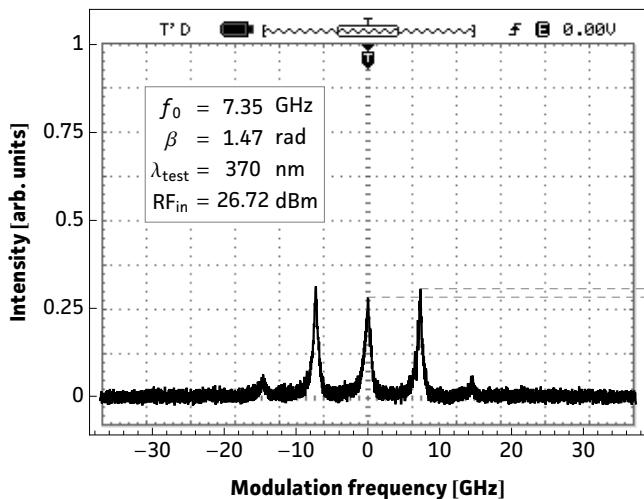


Fig. 2: Carrier/sideband ratio

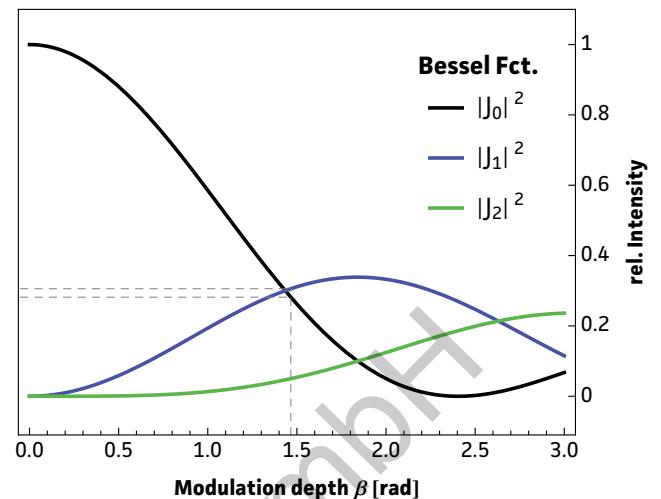


Table 1: Expected modulation

$\beta = 1 \text{ rad}$	unit	λ_1	λ_2
λ	nm	370	650
P	dBm	23.4	30.3
P	W	0.22	1.07
U	V_p	4.7	10.3
U_π	V_p	14.7	32.5
β / U	rad / V	0.21	0.1



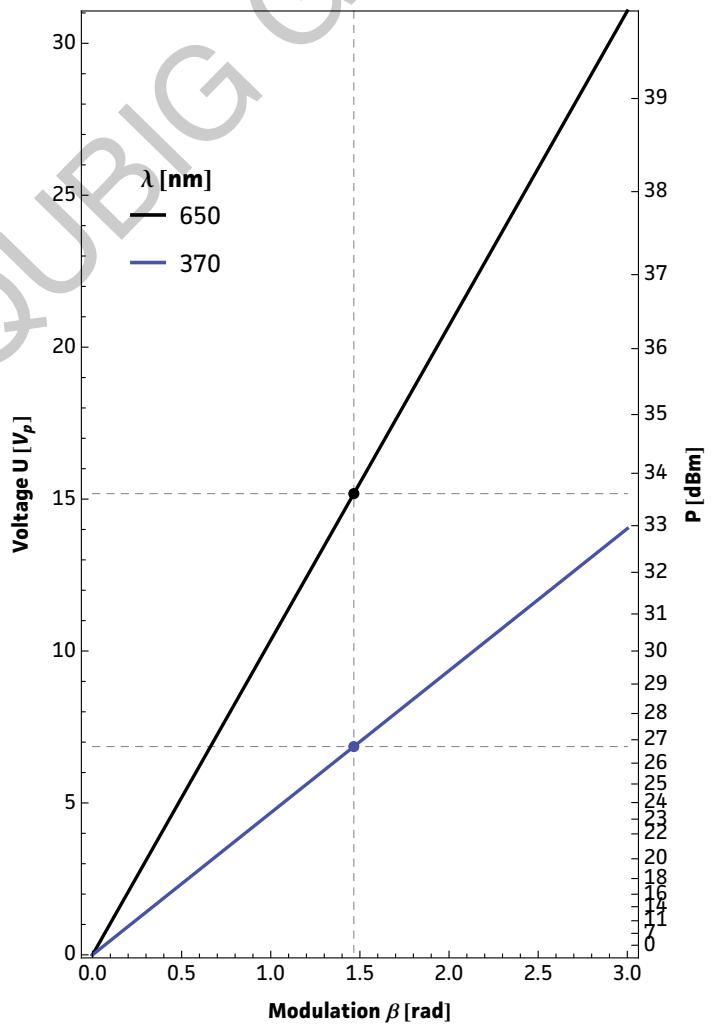


Fig. 3: RF-signal amplitude vs. modulation depth

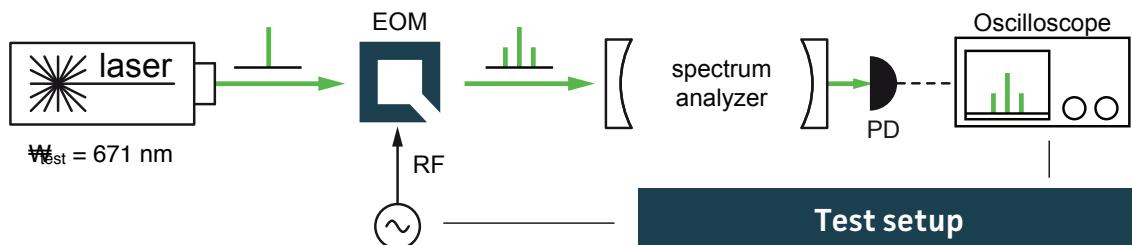


Resonance characteristics

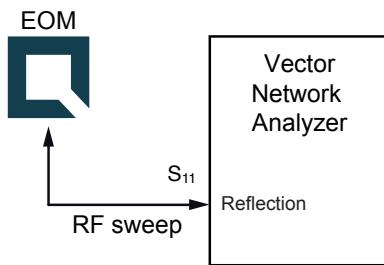


T_{EOM} = 24.13 °C

RS 10/29/2018 3:27:18 PM
1311.6010K62-101870-Bu

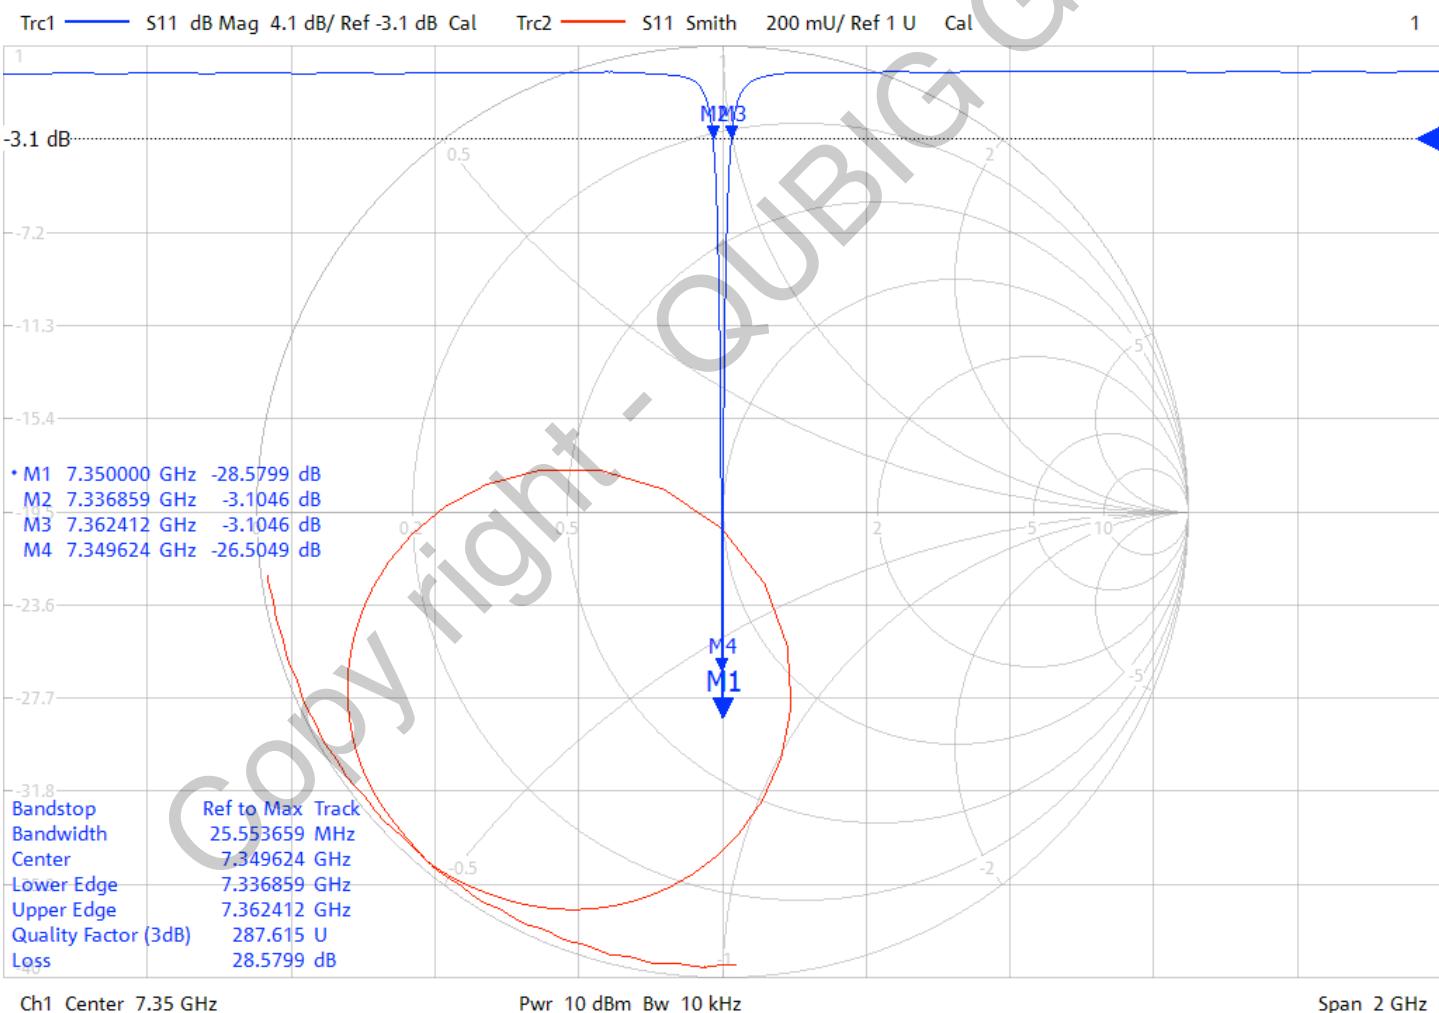

Package drawing

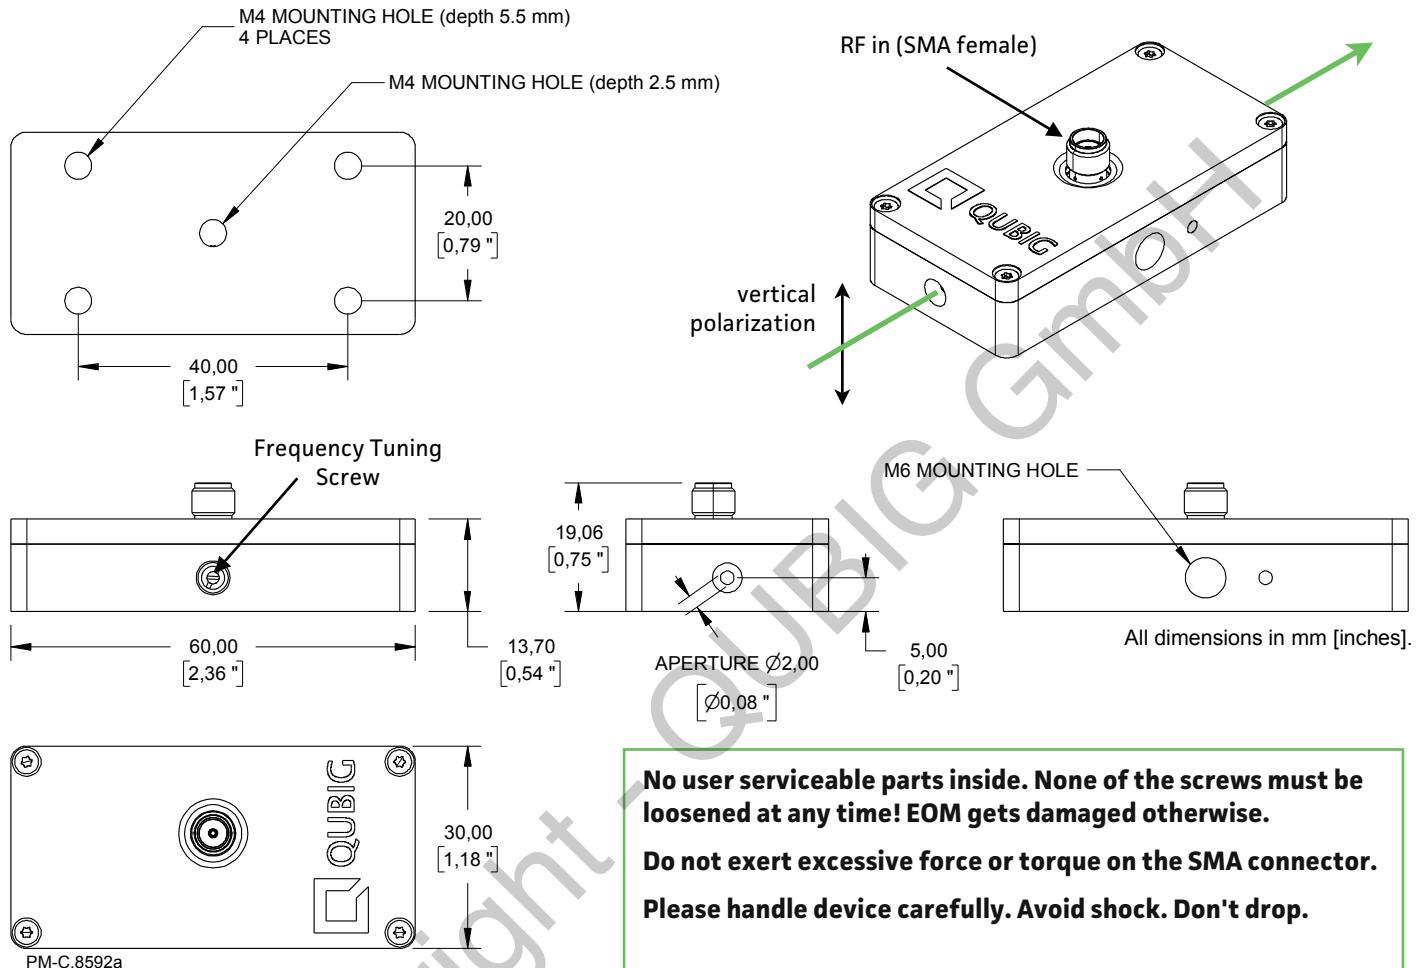

Tested by:

Tel: +49 89 2302 9101
Fax: +49 89 2302 9102
eMail: mail@qubig.com
web: www.qubig.com

Qubig GmbH
Balanstr. 57
81451 Munich
Germany